


NOTICE OF PROPRIETARY RIGHTS: THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO Somefly technology Co.,Ltd.
IT MUST NOT BE REPRODUCED OR DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY, IN WHOLE OR PART EXCEPT AS AUTHORIZED
IN WRITING BY Somefly technology Co.,Ltd.

RoHS compliant

SYM	REVISION	DESCRIPTION	DFTM	DATE	APPD	APPD

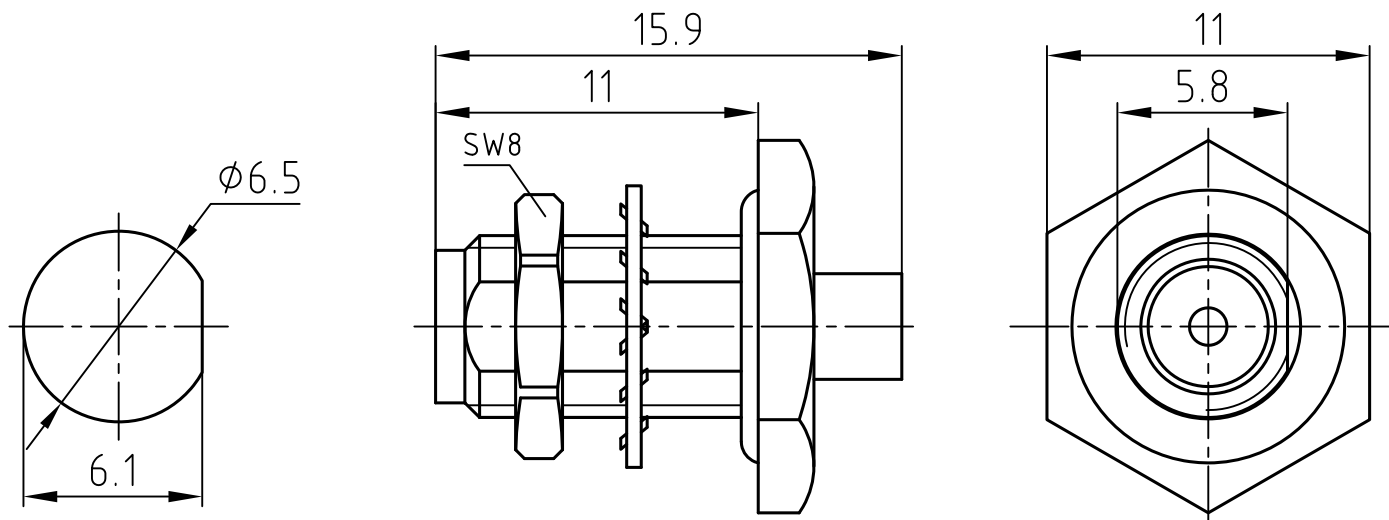

MOUNTING HOLES

NOTES:

1. MATERIALS AND FINISHES:

BODY - STAINLESS STEEL 303, PASSIVATED
OUTER CONTACT - STAINLESS STEEL 303, PASSIVATED
INNER CONTACT - BeCu, GOLD PLATING
INSULATOR - ULTEM 1000

2. ELECTRICAL:

A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC - 40 GHz
C. VSWR: 1.45 MAX.
D. INSERTION LOSS: $0.05 \times \sqrt{F(\text{GHz})}$ dB MAX.
E. VOLTAGE RATING: 500 VRMS
F. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS MIN.
G. INSULATION RESISTANCE: 1000 MΩ MIN.

3. MECHANICAL:

A. DURABILITY: 100 CYCLES MIN.
B. TEMPERATURE RANGE: -40°C TO +125°C
C. COMPATIBLE WITH ALL STANDARD: IEC 61169-35
4. PACKAGING:
A. QUANTITY: PACK 1PCS
B. MARKING: TRAY TO BE MARKED ""

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

MATL:		UNLESS OTHERWISE SPECIFIED			DFTM: TaoYang		Somefly technology Co.,Ltd									
		ALL DIMENSIONS ARE IN mm MACHINED SURFACES FINISH 1.6RMS MAX. REMOVE ALL BURRS 0.15×45° MAX. BREAK MACHINE CORNERS 0.15×45° D MAX. FILLET R. TOLERANCES ON DECIMALS .X ±0.2 .XX ±0.1 ANGLES ±2° FRACTIONS ±N/A			DATE: 2020.09.04											
					CHKD HeTong											
					USED ON:					DATE: 2020.09.04		2.92mm Female Bulkhead For 086 Cable Solder With Seal				
			APPD: Stone													
SCALE: 4/1		DWG SIZE A4		DO NOT SCALE DRAWING		SURFACE (mm²) XX		WEIGHT (g) XX		DATE: 2020.09.04		SHT	047-K3L16-CS		REV A.	