


NOTICE OF PROPRIETARY RIGHTS: THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO Somefly technology Co.,Ltd.
IT MUST NOT BE REPRODUCED OR DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY, IN WHOLE OR PART EXCEPT AS AUTHORIZED
IN WRITING BY Somefly technology Co.,Ltd.

RoHS compliant

SYM	REVISION	DESCRIPTION	DFTM	DATE	APPD	APPD

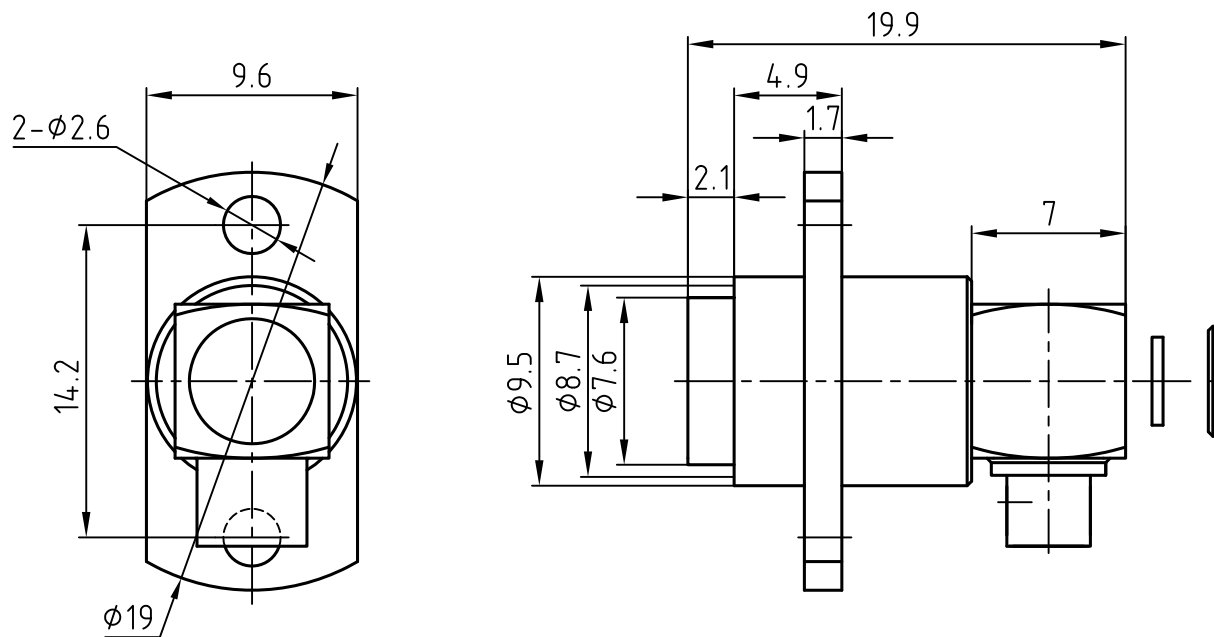

NOTES:

1. MATERIALS AND FINISHES:

BODY - BRASS, GOLD PLATING
OUTER CONTACT - BRASS, GOLD PLATING
INNER CONTACT - BERYLLIUM COPPER, GOLD PLATING
INSULATOR - PTFE, NATURAL

2. ELECTRICAL:

A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC - 6 GHz
C. VSWR: 1.25 MAX. @ DC - 3 GHz, 1.35 MAX. @ DC3 - 6 GHz
D. INSERTION LOSS: $0.05 \times \sqrt{F(\text{GHz})}$ dB MAX.
E. VOLTAGE RATING: 500 VRMS
F. DIELECTRIC WITHSTANDING VOLTAGE: 2000 VRMS MIN.
G. INSULATION RESISTANCE: 5000 MΩ MIN.

3. MECHANICAL:

A. DURABILITY: 100 CYCLES MIN.
B. TEMPERATURE RANGE: -40°C TO +125°C
C. COMPATIBLE WITH ALL STANDARD: MIL STD 348
4. PACKAGING:
A. QUANTITY: PACK 100PCS
B. MARKING: TRAY TO BE MARKED ""

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

MATL:		UNLESS OTHERWISE SPECIFIED			DFTM: TaoYang		Somefly technology Co.,Ltd			
		ALL DIMENSIONS ARE IN mm MACHINED SURFACES FINISH 1.6RMS MAX. REMOVE ALL BURRS 0.15×45° MAX. BREAK MACHINE CORNERS 0.15×45° D MAX. FILLET R. TOLERANCES ON DECIMALS .X ±0.2 .XX ±0.1 ANGLES ±2° FRACTIONS ±N/A			DATE: 2020.07.16					
					CHKD HeTong		BMA RA Female Flange Mounting For 086 Cable Solder			
					DATE: 2020.07.16					
USED ON:					APPD: Stone					
SCALE: 3/1	DWG SIZE A4	DO NOT SCALE DRAWING		SURFACE (mm²) XX	WEIGHT (g) XX	DATE: 2020.07.16		SHT	022-B3H07-1RB	REV A.0