


NOTICE OF PROPRIETARY RIGHTS: THIS DRAWING CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO Somefly technology Co.,Ltd.
IT MUST NOT BE REPRODUCED OR DISCLOSED TO OTHERS OR USED IN ANY OTHER WAY, IN WHOLE OR PART EXCEPT AS AUTHORIZED
IN WRITING BY Somefly technology Co.,Ltd.

RoHS compliant

SYM	REVISION	DESCRIPTION	DFTM	DATE	APPD	APPD

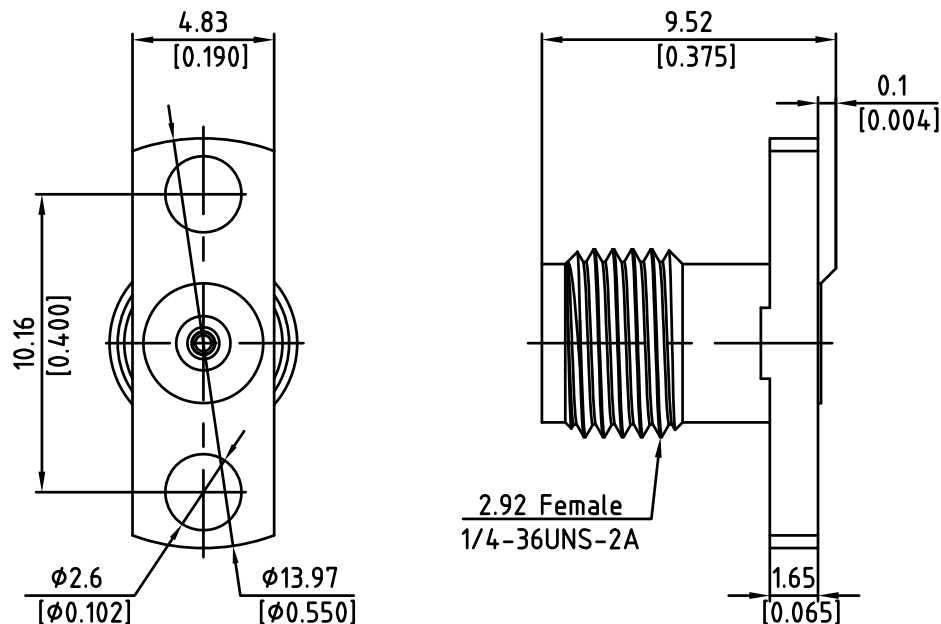

Part NO.	d Dia.	D Dia.	Dielectric NO.	Pin NO.
041-K3F22-CS51	0.51	1.62	02-A100-K51	04-A116-K51
041-K3F22-CS38	0.38	1.22	02-A100-K38	04-A116-K38
041-K3F22-CS31	0.30	0.99	02-A100-K31	04-A116-K31
041-K3F22-CS23	0.23	0.74	02-A100-K23	04-A116-K23

NOTES:
1. MATERIALS AND FINISHES:
BODY - STAINLESS STEEL, PASSIVATED
OUTER CONTACT - STAINLESS STEEL, PASSIVATED
INNER CONTACT - BERYLLIUM COPPER, GOLD PLATING
INSULATOR - PEI, NATURAL
2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. FREQUENCY RANGE: DC - 40 GHz
C. VSWR: 1.25 MAX.
D. INSERTION LOSS: 0.05X $\sqrt{f}$ [F(GHz)] dB MAX.
E. VOLTAGE RATING: 500 VRMS
F. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS MIN.
G. INSULATION RESISTANCE: 1000 MΩ MIN.

3. MECHANICAL:
A. DURABILITY: 1000 CYCLES MIN.
B. TEMPERATURE RANGE: -40°C TO +125°C
C. COMPATIBLE WITH ALL STANDARD: IEC61169-35
4. PACKAGING:
A. QUANTITY: PACK 1PCS
B. MARKING: TRAY TO BE MARKED ""

CUSTOMER OUTLINE DRAWING
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

MATL:		UNLESS OTHERWISE SPECIFIED			DFTM: 006		Somefly technology Co.,Ltd			
		ALL DIMENSIONS ARE IN mm MACHINED SURFACES FINISH 1.6RMS MAX. REMOVE ALL BURRS 0.15x 45°MAX. BREAK MACHINE CORNERS 0.15x 45°D MAX. FILLET R. TOLERANCES ON DECIMALS .X ±0.2 .XX ±0.1 ANGLES±2° FRACTIONS±N/A  			DATE: 2022.05.19					
					CHKD HeTong		2.92 Female 2 Hole .55 Long Flange Field Replaceable			
					DATE: 2022.05.19					
USED ON:					APPD: Stone					
SCALE: 4/1	DWG SIZE A4	DO NOT SCALE DRAWING			SURFACE (mm ²) XX	WEIGHT (g) XX	DATE: 2022.05.19	SHT	041-K3F22-CSxx	REV A.0